

MATERIAL SPECIFICATIONS:

FRAME : .83 ALUMINUM EXTRUSION
LEG : 3/4" X 18 GAUGE C.R.E.W. STEEL TUBING
FLOORPLATE: 3/4" PAINTED PLYWOOD


CONSTRUCTION SPECIFICATIONS:

▲ THE BED IS AVAILABLE IN TWO (2) SIZES CHARTED IN THE MIDDLE OF THIS DRAWING.
THE BOTTOM OF THE BED FRAME PROVIDES THE WALL CLOSURE.
THE BED IS SHIPPED WITH NO FACE PANEL INSTALLED,

RECESS MUST BE CONSTRUCTED BEFORE BED IS INSTALLED. SHEETROCK CONSTRUCTION IS NOT ALLOWABLE ALONGSIDE BED FOR SUPPORT. BED MOUNTS INTO STEEL ATTACHMENT PLATES WHICH ARE SECURED TO EACH SIDE OF RECESS. A MINIMUM OF 3/4" PLYWOOD IS REQUIRED FOR ATTACHMENT OF PLATES AND BUMPERS.
TWO PULL HANDLES ARE PROVIDED WITH EACH BED FOR CUSTOMER TO INSTALL, OR THEY MAY USE THEIR OWN HANDLE DESIGN. TWO PILOT HOLES ARE DRILLED ALONG EACH SIDE OF THE FRAME ON 3" CENTERS FOR ATTACHING HANDLES.

ADJUSTMENT BOLTS ALLOW ALIGNMENT IN THE RECESS OPENING AND COMPENSATE FOR THE WEIGHT AND DIFFERENCES IN BED FACES.
BED IS SHIPPED IN ONE CARTON.

* THIS DIMENSION PROVIDES 1 7/8" GAP BETWEEN TOP RAIL AND RECESS OPENING. THIS IS DONE TO AVOID FINGER PINCHING.

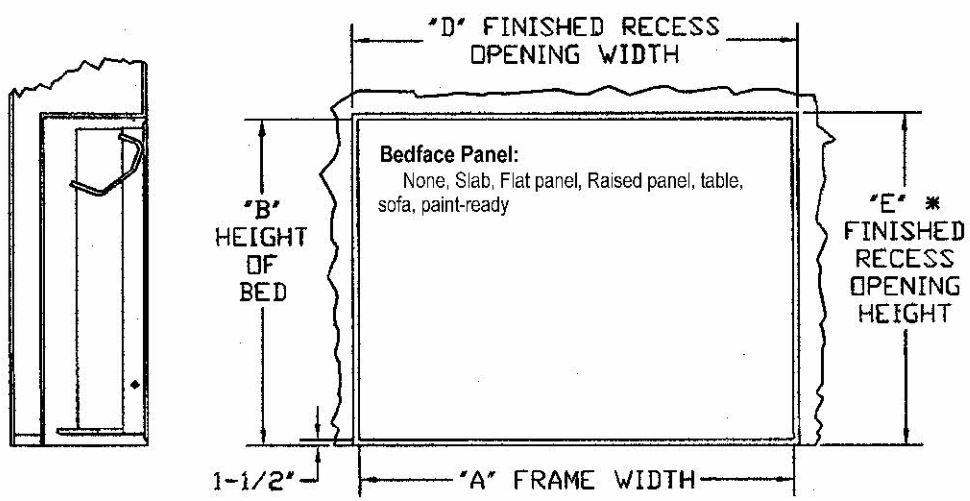

Bed Raised



BED SIZE	A	B	C	D	E*	F
DOUBLE	77	57	48 7/8	77 1/2	58 7/8	47 7/8
QUEEN	82	63 1/2	53 3/8	82 1/2	65 3/8	54 3/8

Mattress selection of any bedding manufacturer. Thickness is critical in determining depth of storage cavity. Best suggestion: 12" thick or less for good leg storage.


Eurobed Sidefold Specification Drawing

(Page 1 of 2)

EUROBED WALLBED NUMBER FORMAT

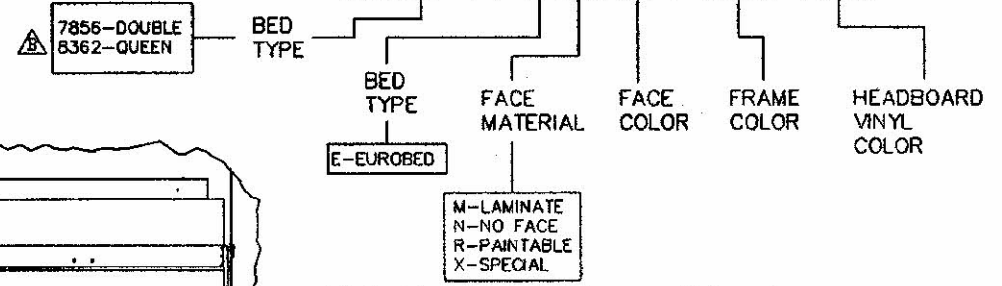

FlyingBeds.com Denver, Colorado
303 333-3052 888 892-4645

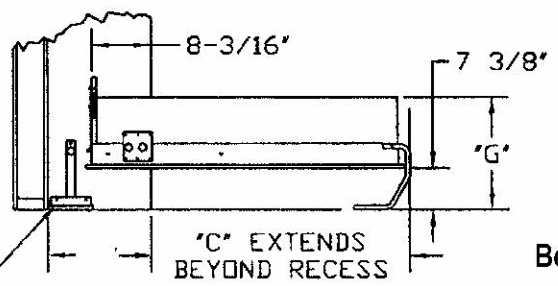

Bed Lowered

BASESPACER (REQUIRED ON FREESTANDING VERTICALS)